


INSTALLATION INSTRUCTIONS

Upon receipt of fixture and accessories (packed separately) thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the packing slip with the fixture label on the inside of the housing to be sure you have received the correct merchandise.

TWP

Wall-Pak

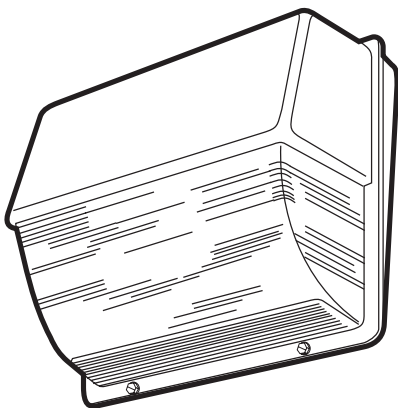

IMPORTANT SAFETY INSTRUCTIONS


(For Your Protection, Read Carefully)

- This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- Proper grounding is required to ensure personal safety.
- Use approved connectors for all electrical connections.
- ALL work should be done by a qualified electrician.
- **WARNING:** NEVER disconnect any component while power supply is engaged.


Prior to Installation

Read carefully before installing light fixtures. If you do not understand these instructions, please contact your local Lithonia distributor before installing.

INSTALLATION

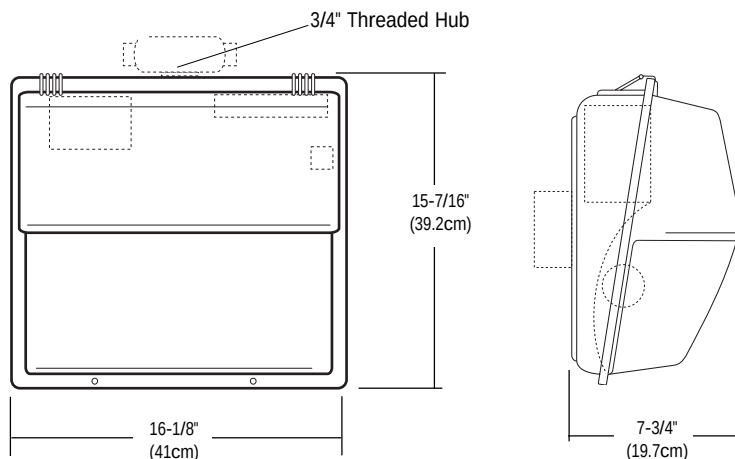

1. Loosen the 2 stainless steel captive screws in front housing and remove front housing from fixture. Remove steel component cover.
2. Mount fixture using dimensions shown to the right.
3. Make supply connections (outlet box or conduit tee, not provided). Replace steel component cover and install lamp following the lamp manufacturer's instructions.
4. Replace front housing and tighten the two stainless steel captive screws.

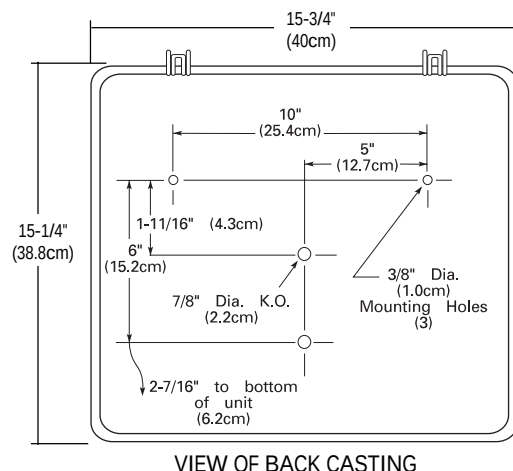

LAMP INSTALLATION: Prior to installing the lamp in the fixture, check to be sure the lamp is of proper type and wattage. Screw the lamp securely into the socket, back the lamp out one to two turns, then screw the lamp back in, making sure it is secure. This properly seats the lamp in the socket.

WARNING: NEVER perform maintenance or cleaning while fixture is energized.

CAUTION: Observe lamp manufacturer's recommendations and restrictions on lamp operation, particularly ballast type, burning position, etc.

MAINTENANCE: Your Lithonia fixture is designed for years of trouble-free operation. For optimum performance, periodically clean reflector and lens with a nonabrasive cleaner.

TROUBLESHOOTING: If this fixture fails to operate properly, check to make sure:

- The correct lamp is properly installed.
- The fixture is wired correctly.
- The lamp is not faulty.
- The fixture is grounded correctly.
- The line voltage at the fixture is correct.
- The photocell is of proper voltage and wattage.
- There is no reflected light back into the photocell causing the fixture to turn off.

If all these variables have been checked and the fixture still does not operate properly, contact your local Lithonia Lighting distributor.